Photosensitive sensor

Tail line Positioning waterproof Kit x1 paper x1

After open packing list box, please check product body and

accessories as below:

Power x1 Accessories (Optional) kit x1


SMART CAMERA


Quick Manual for Android and iOS

Before use, please pay attention to the interface and button of camera.

Reset button: Long press to restore the camera to factory settings


1.Download APP --- WiFi antenna

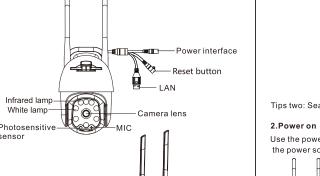

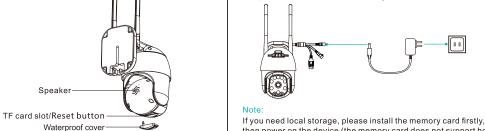

White lamp





3.Camera configuration

Connect your phone to WiFi.


01.User login

Tips one: Scan QR code.



Tips two: Search "iCSee" in the App store and download.

Use the power adapter to connect the camera power interface and the power socket. As shown in the figure below.



then power on the device (the memory card does not support hot swapping, please plug and unplug the memory card when the device is powered off). Cloud storage is recommended, which is safe and convenient. Details See "Step 4" for operation.

1. Wireless network configuration

ID : ≈ "...I ■ 08:32

Forget Password

Quick Login -


Open the iCSee app, register an account and login(Figure 1).

Username UserName/Email

Password Password

Save PW

Figure 1



02.Quick configuration

After successful login, Click the "+" button (Figure 2).

Set network configuration according to the camera's voice

that the camera has successfully configured the network.

Note: If the camera does not have a prompt sound for a long time, you can

press and hold the camera Reset button until you hear the prompt "Restore

factory settings, please do not power off "and release it to restore the camera

prompts and the APP interface step-by-step guide. When the

camera emits a "Connect router successfully" prompt, it means

Click the "WiFi Camera" (Figure 3).

to factory settings and then configure the network.




Figure 3



to add a device (Figure 7).

instructions on the APP interface to set the camera password

After the network configuration is successful, follow the

screen, and carry out relevant operations and settings(Figure 4).

Figure 4

Smart Device ▼

Figure 5 After the configuration is completed, the device is displayed in the device list interface. Click to open the real-time preview

> WiFi Camera 4G Camera VIOT Station DVR/NVF

Add Device

Figure 7

After the configuration is completed, the device is displayed in



the device list interface. Click to open the real-time preview screen, and carry out relevant operations and settings(Figure 4).

Figure 6 Add Device

AP connection

Steps to open cloud storage: click the "cloud storage" or "cloud"

icon in the device list interface (Figure 8), and follow the guidance of the app interface to understand and open the cloud storage package, with a variety of packages available.

Share Cloud Storage Home Guard Settings

Device Mobile Storage Cloud Me



Figure 8 Q: what should I do if forget the device password? Smart Device ▼



Q: How do cameras store video?

- 2.Plug the camera power to restart camera.
- 3. Restore the camera to factory settings.

different, generally SSID of 2.4G is xxxxx-2.4G, SSID of 5G

is xxxxx-5G), please connect WiFi of mobile phone to hotspot

that are inconsistent with product functions or printed errors. A: If you use 5g router, 5G and 2.4G use the same connection Please refer to our company's final interpretation..

- A: 1.Local TF card storage, maximum support up to 128G TF avoid being misappropriated by criminals. card after full automatically delete earlier video, overwrite
- 2.Cloud storage.
- A: Re-connect and set a new password after the device is

- without notice. The manual is for reference only.

Q: Is 5g router supported?

of xxxxx-2.4G of router before configuring camera.

hotspot (that is, SSID is the same), you can connect directly. If 50 and 2.4G are not the same connection hotspot (that is, SSID is

1. Please change the user password while using this product to

- 2. Do not install the device in a place that is damp, dusty, or
- accessible to children.
- 3. Please use and store within the allowable temperature and humidity range, and do not disassemble the equipment at will.

- 2. The APP and product firmware will be updated from time to time. You can upgrade to the latest firmware online by yourself
 - 3. The manual may contain technically inaccurate parts or parts

Warranty period: one year.

Warranty Card

Product

Name

Date

Cause

Name

Customer Phone

This warranty card is only for our company's products

Store

Customer Gender