


HDWL-30

Quick Start Guide

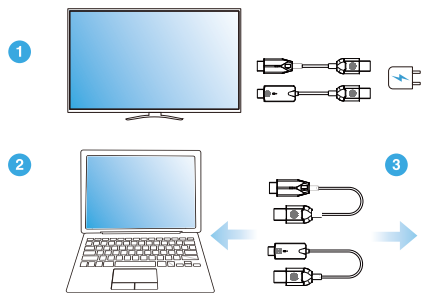

Installation procedure:

1. Connect the HDMI and USB ports of the receiver of the wireless transmitter to the display device such as the TV or projector.
2. Connect the HDMI and USB ports of the transmitter of the wireless transmitter to the display device such as laptops, desktops, set-top box cameras, and camcorders.
3. After the connection is complete, the blue light of the transmitter will blink first, and becomes steady. When the connection is successful, the screen will show the video.

Note:

1. Equipment operating temperature: About 50 degrees ,but it is normal t emperature which does not affect the use.
- 2.The device has been paired before leaving the factory, and the user does not need to re-pair.
- 3.The light at the receiving end will only be on, only as power indication

HDWL-30

Quick Start Guide

Wireless Transmitter Pairing Method

Pairing Steps


1 Receiver side

- (1) Connect the receiver USB port to the USB power supply or device with USB port
- (2) Connect the receiver HDMI port to the display device
- (3) use a paperclip to press the reset button on HDMI side of the receiver for about 2 seconds (not so long), wait for the screen to display "Release the button to pair with Mate" then immediately release the button



2 Transmitter side


- (1)Connect the transmitter USB port to a USB-powered device, and wait for the screen to display "Ready to pair".
- (2) Use a paperclip to insert the pairing/reset hole at the HDMI end and press the pairing button for 5 seconds, wait until the signal light goes off and release the button.
- (3)Then wait for the screen to show "✓" to indicate successful pairing.

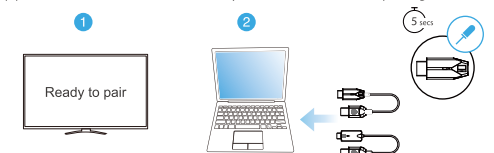

Attention:

- The reset hole on the receiver side of the wireless transmission has two setting modes depending on the pressing time.
- (1) Press and hold for 2 seconds: open the pairing mode of the receiver for pairing with the transmitter, so the pairing pairing can not be pressed for too long
 - (2) long press 10 seconds: the receiver back to the original factory settings.

1 transmitter and 1 receiver



Supports many-to-one mode

Supports up to 8 transmitter to 1 receiver

