M20 Astronaut DODO Smart Bluetooth Speaker

We reserve all patents, trademarks, copyrights and other intellectual property rights


If the product function parameters are changed without notice, the product is subject to the actual product

Product parameters:

Product name: Astronaut DODO smart bluetooth speaker
Model: M20
Product material: ABS PC silicone
Audio output power: 6W (RSM).
Frequency response range: 50HZ-20KHZ
Bluetooth version: Jie Li 5.1 + EDR
FREQUENCY: 2.4-2.48GHZ
Receiving distance: 5-15M
Charging voltage: DC 5V ⎓ 1A
Battery capacity: 1800mAh
Color: milk tea white girl pink
SPECIFICATIONS: 170*120*100MM
Product features: AI voice intercom Bluetooth connection playback Bluetooth hands-free call clock display
Alarm setting Night light TF card playback FM radio USB sound card
Receiving distance: 5M-15M (barrier-free receiving distance, depending on the environment and equipment, the receiving distance is different.))
(Note: The above configuration data will be continuously improved according to the main control upgrade, and the specific content shall prevail)

Packaging accessories

Package contains:
Astronaut DODO smart bluetooth speaker user manual 1 copy certificate 1 servings
1 high-speed TYPE-C-USB power cable

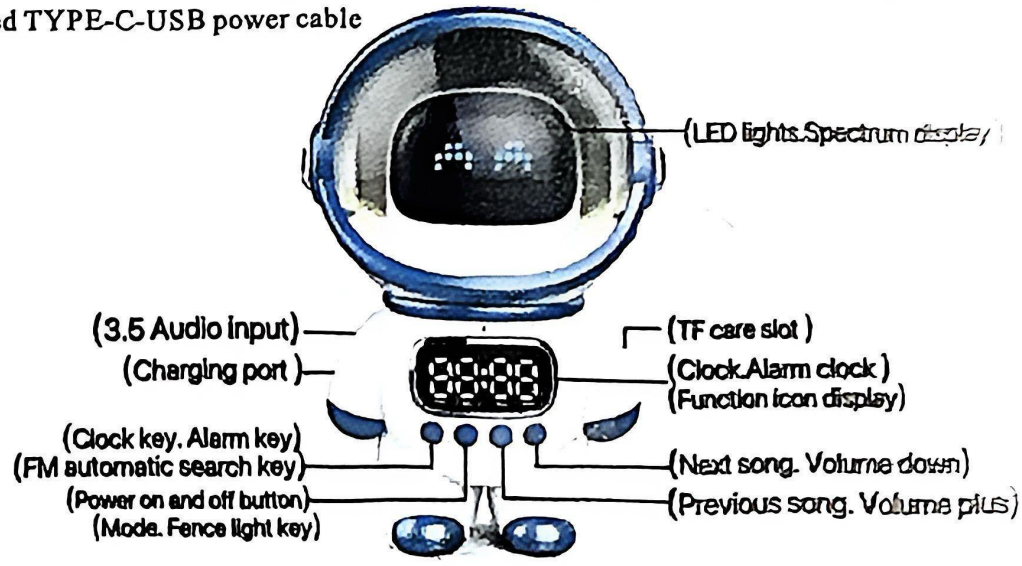

Chapter 1: Product Function Key Description

1. Function key introduction and operation:

M key on/off:

Long press the M key to turn on, hear the boot prompt tone after the product boots, and default Bluetooth mode, Bluetooth search within 10 minutes do not pair the phone, Bluetooth will enter the low-power mode, you need to click the ,M key to activate the Bluetooth search status. Press and hold the M key to shut down

M key on/off the surrounding light

In power-on mode, double-click the M key to turn on/off the surrounding lights

Clock setting key

Long press the key to enter the clock adjustment, when the screen digital flashes, adjust the clock number by short press + or — keys, and then short press the key to enter the minute setting, short press+ + or — key to adjust the minute number, press and hold the key to confirm the setting.

Alarm setting key

Long press the key to enter the clock setting interface, and then short press (two buttons) to enter the alarm adjustment mode, the alarm symbol will flash, at this time the left clock number is flashing, by short press + or - keys to adjust the clock number addition and subtraction, and then short press /b16> button to jump to the right to adjust minute number addition and subtraction, long press the alarm button to confirm the setting.

Alarm off setting: In the power on state, quickly double-click the alarm button, and the alarm icon disappears, that is, the alarm mode is turned off.
(This product sets the alarm clock second wake-up function, when the alarm sounds, if you do not manually turn off the alarm will be 5, Again in minutes)

+AND AFTER key

Long press + key volume plus, long press - key volume down, short press - key- on the song. Short key + next song, press the + and - keys at the same time+ to switch between Chinese and English speech

Chapter 2: Operating Instructions
Pay attention to the official account

2. TF card extended MP3 music playback
The first step is to confirm that the memory card **is 1-32G** (the memory **format is preferably FAT32-bit** format, built-in is **MP3** format songs) will **TF** The card is inserted into the card slot, and the turn on automatically recognizes and plays the song
3. Wireless Bluetooth playback:
After booting, the state of not plugging in the TF card defaults to Bluetooth mode You can also manually switch to Bluetooth mode by pressing the M key shortly
Connect: Turn on your phone and turn on the phone Bluetooth search and select the Bluetooth device "Astronaut DODO Smart Bluetooth Speaker."
"Pairing, after successful pairing, a connection prompt tone will be emitted, indicating that Bluetooth has been successfully connected and music on the Bluetooth device can be played normally.
4. FM radio settings
Short press the M key to switch to the radio mode, and then press (alarm clock key) to enter the FM automatic search station, automatically save the station after the search is completed, press the + key - key to select the radio station (Note: When the station cannot be found, please insert the charging cable, the charging cable is FM radio antenna to use).
5. TWS couplet mode: two boots at the same time, will automatically connect, successful connection will prompt (the box is connected).
6. Charging indicator: when charging, the battery icon is always on, fully charged, and the battery icon is off

Chapter 3: Troubleshooting

1. Multiple connections and pairings are unsuccessful
Turn off the speaker and turn the phone back on, and make sure the connection name is: Astronaut DODO Smart Bluetooth Speaker
2. There is a stutter in music playback
a. Whether the connection distance is out of range or there is an obstacle between the speaker and the mobile phone;
b. Whether the mobile phone network is smooth and whether the speaker battery is low.
3. Play silently
Check that the speaker is the least sound (press and hold the plus or minus keys to adjust the sound volume)
4. Unable to turn on
Check whether there is power, plug in the USB charging cable, charge for 2 hours and try again.
5. AI intelligence cannot talk
Confirm whether Bluetooth is connected and whether the Xiaoyun Assistant APP is running in the background of the mobile phone
6. How to set the clock
After the speaker Bluetooth is connected to the mobile phone, and download the Xiaoyun Assistant APP, if the time cannot be synchronized, you can manually switch the clock mode to set
7. There is a crash
Find a needle and gently insert the audio port to reset and restart to solve the crash problem

Chapter 4: Charging Instructions

a. Please use the standard or equivalent power adapter to charge the device;
b. During the use of the product, when the power is low or the power is insufficient, it should be charged as soon as possible
c. Do not use this equipment under high temperature and high pressure
d. When not in use for a long time, it is recommended to charge the device once a month to ensure that the battery is sufficient and the equipment is used normally when it needs to be used!

Chapter 5: After-sales service description

Dear user, thank you very much for using our products, in order to effectively protect your rights and interests, clear distribution agents and companies should bear the responsibility and obligation of product maintenance, replacement, return (referred to as three guarantees), please read the following:
1. According to the three-guarantee principle of who sells who is responsible, if the product has a quality problem, contact the dealer with the (warranty card), the dealer provides services to the customer, and our company provides service support to the dealer;
2. The company promises that from the date of sale (the date is subject to the date of valid bills and online platform orders), within seven days of quality problems, customers can choose to return replacement and repair, three months customers can choose to replace (appearance without serious damage), within one year customers can enjoy free maintenance (do not bear the corresponding transportation costs), beyond the warranty scope, quality problems, each after-sales service outlet only charges component material fees and transportation costs.
3. The following situations do not enjoy the three-guarantee service
A. Exceeding the three-guarantee period
B is not used in accordance with the requirements of the instruction manual and is damaged due to improper operation
C Disassemble by itself, resulting in unusability
D caused by force majeure

Chapter 6: Safety Guidelines

1. If consumers use power adapters for power supply, they should use power adapters that have obtained CCC certification and meet the requirements of relevant standards.
2. The product has a built-in lithium battery, which cannot be replaced, and should not be discarded or placed in a fire to avoid causing danger.
The right to interpret the above matters belongs to the company

